

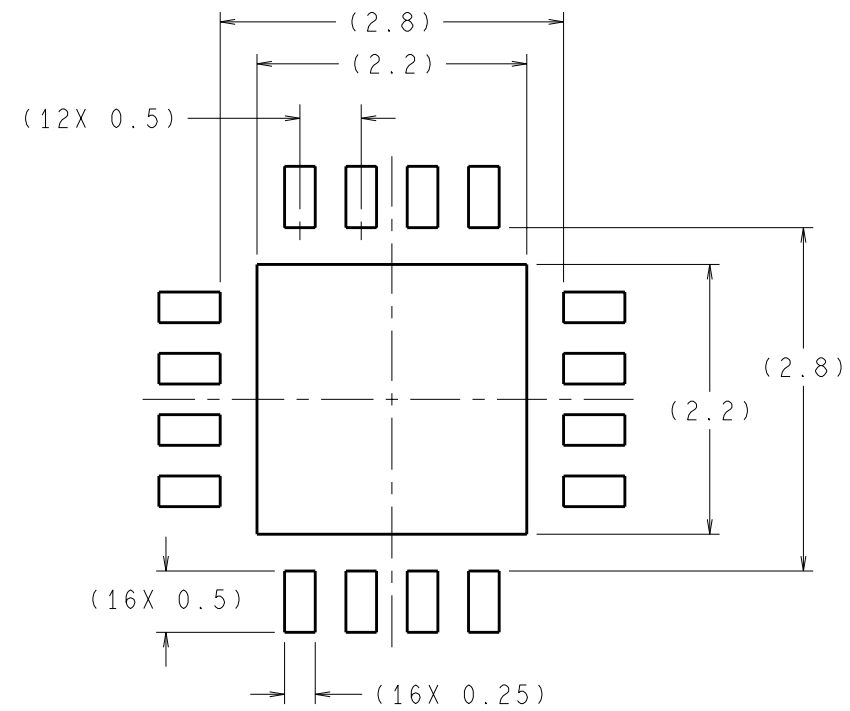
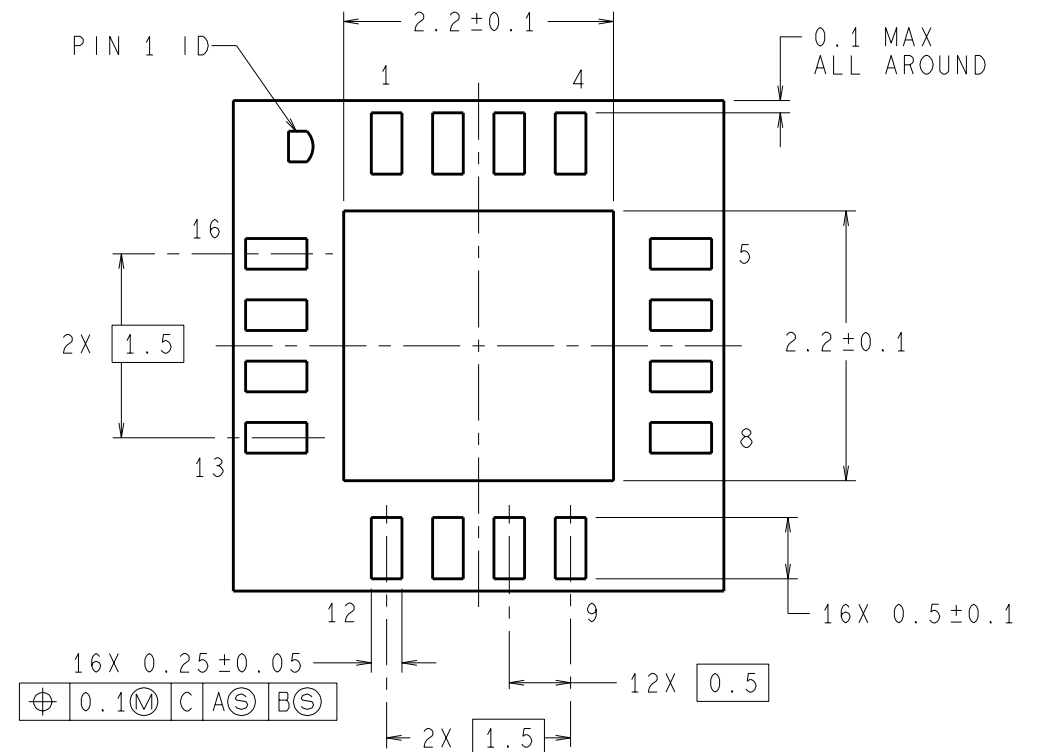


REVISIONS				
LTR	DESCRIPTION	E.C.N.	DATE	BY/APP'D
A	RELEASE TO DOCUMENT CONTROL	12442	04/28/2000	SN/TL/AL

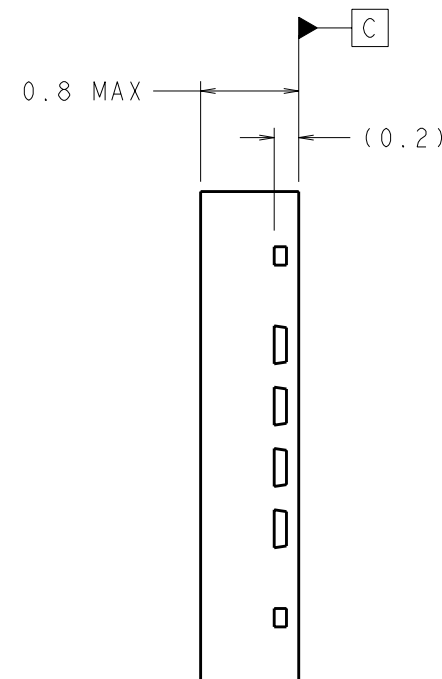

DIMENSIONS ARE IN MILLIMETERS

RECOMMENDED LAND PATTERN
1:1 RATION WITH PKG SOLDER PADS

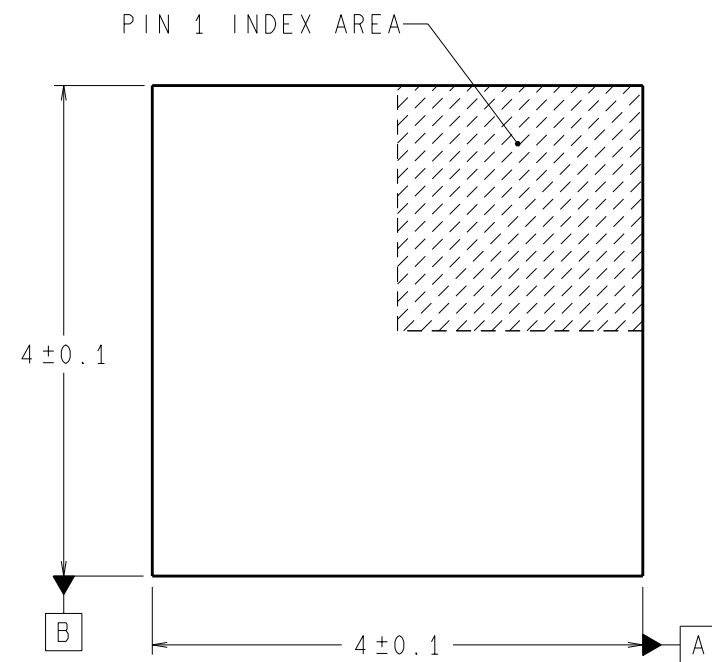

NOTES: UNLESS OTHERWISE SPECIFIED

- STANDARD LEAD FINISH TO BE 5.08 MICROMETERS MINIMUM LEAD/TIN (SOLDER) ON COPPER.
- NO JEDEC REGISTRATION AS OF APRIL 2000.

APPROVALS		DATE	 National Semiconductor 2900 Semiconductor Dr., Santa Clara, CA 95052-8090		
DRAWN M. SANTHIRAN & TL		04/28/2000			
DFTG. CHK. MARTA SUCHY		04/28/2000	LLP, PLASTIC, QUAD, 4 X 4 X 0.75 mm BODY, 16 LD, 0.5 mm PITCH		
ENGR. CHK. ANTHONY LAW		04/28/2000			
 PROJECTION INCH [MM]		SCALE	SIZE	DRAWING NUMBER	REV
		N/A	C	(SC)MKT-LQA16A	A
DO NOT SCALE DRAWING				SHEET 1 of 1	